


MINUSCULE RECESSED ASYMMETRICAL EYELID MINIM.IS/cyst



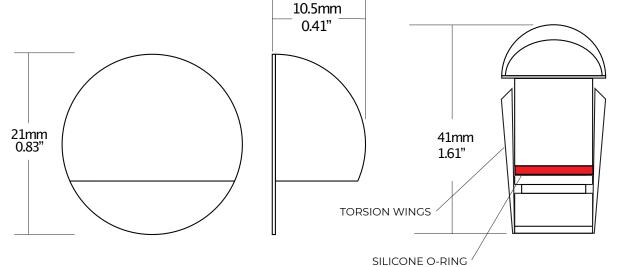

SPECIFICATIONS

MATERIAL: PRECISION, HAND-MILLEDTITANIUM WARRANTY: 5-YEAR LIMITED WARRANTY

 PIGTAIL:
 23-INCH (58CM) DOUBLE-SHEATHED PIGTAIL
 LUMINAIRE WEIGHT:
 0.1 LB (45 GRAMS)

 POWER REQUIREMENT:
 CONSTANT VOLTAGE 12-VOLT DC, PARALLEL TOPOLOGY
 MP FAMILY RATING:
 125mA @ 12vDC = 1.5 watt

 ENVIRONMENT:
 IP67, IP65, DAMP, WET, DRY, IC, CONCRETE, DRYWALL
 LUMEN OUTPUT:
 45 LM (DELIVERED)

RESTRICTIONS: NOT SUITABLE FOR HORIZ. OR UPWARD ORIENTATION IN CERTIFICATIONS: UL 2108 for IC, concrete, and in-grade. IP67 and IP65 + dry WET ENVIRONMENTS

HOW TO SPECIFY. LUMINAIRE EXAMPLE CODE: CY-MP-30-BK-NOKIT-NOPW-N/A

PROD.	FAMILY	CCT & CRI	BEZEL COLOR	TRIM KIT	POWER KIT	DIMMING PROTOCOLS ⁴
CY	MP	27 2700° K CRI 90+)	TI NATURAL TITANIUM	TRKTRD16 ²	PKMP-0115 FOR 1 TO 15 LIGHTS	S 10V 0-10VDC+10V PWM ³
		30 (3000° K CRI 90+)	AU MATTE GOLD ³	NOKIT	PKMP-1630 FOR 16 TO 30 LIGHT	ITS DLI DALI + 10V PWM ³
		35 (3500° K CRI 90+)	BK MATTE BLACK ³		NOPW NO POWER	DL2 DALI-2 + 10V PWM ³
		40 (4000° K CRI 90+)				N/A NO POWER
		50 (5000° K CRI 90+)				

- 1. A MINIMUM OF THREE (3) LUMINAIRES ARE REQUIRED MEET DIMMING "MINIMUM LOAD" OBLIGATIONS. DIMMING LESS THAN THREE (3) WILL INVALIDATE WARRANTY.
- 2. ALL-TITANIUM CONCRETE / PLASTER TRIM KIT "BEFORE THE POUR". DATASHEET: https://minim.is/cutsheet/CUT-SHEET-TRKTXXXX.pdf
 3. SUBJECT TO AVAILABILITY, ADDITIONAL CHARGE, AND LEAD TIMES. INCORRECT CHOICE RESULTS IN RESTOCKING FEE.
- 3. SUBJECT TO AVAILABILITY, ADDITIONAL CHARGE, AND LEAD TIMES. INCORRECT CHOICE RESULTS IN RESTOCKING
- 4. 1 KIT TO POWER 1-15 LIGHTS OR 16-30 LIGHTS. DATA SHEET: https://minim.is/cutsheet/CUT-SHEET-PKMPXXXX.pdf



WARRANTY NOTES + DISCLAIMER

MALFUNCTION AND/OR DAMAGE TO PRODUCT DUE TO EMPLOY OF INCOMPATIBLE OR DEFECTIVE DIMMING SYSTEM / PROTOCOL, OR DUE TO DISREGARD OF INSTALLATION INSTRUCTIONS WILL NOT BE COVERED UNDER WARRANTY. CONTACT MINIMIS FOR RECOMMENDED POWER SOURCES. MAINS DIMMING WILL INVALIDATE WARRANTY.

IF FIXTURE IS TO BE INSTALLED WITH A DIMMER OR DIMMING CONTROL SYSTEM A MINIMUM OF THREE (3) LUMINAIRES ARE REQUIRED MEET DIMMING "MINIMUM LOAD" OBLIGATIONS. DIMMING LESS THAN THREE (3) WILL INVALIDATE WARRANTY. CONSULT A DIMMING SYSTEM MANUFACTURER WITH MINIMUM LOAD BEFORE INSTALLING.

MINIMIS RESERVES THE RIGHT AT ITS SOLE DISCRETION TO MAKE DESIGN CHANGES TO OUR PRODUCTS, AT ANY TIME, AND WITHOUT ADVANCE NOTICE.

CONSULT US: +1 305 503 5779 or WWW.MINIM.IS/contact

MINIMIS 1661 WEST AVE #398002 MIAMI BEACH 33239

COPYRIGHT MINIMIS 2023



WWW.MINIM.IS +1 305 503 5779