

QUANTUM LP - QULPXX

TINY-APERTURE RECESSED ARCHITECTURAL LUMINAIRE
MINIM.IS/quantum

FOR RECESSED
INSTALLATION
INTO ALL
MATERIALS

SHARP
CUTOFF
SPOT
58°

QUANTUM LP is arguably the world's smallest architectural LED recessed luminaire for press-fit installation into any material, including drywall, wood, metal, tile, granite, concrete, stone, etc. Ideal for decorative and accent lighting.

Consisting of precision-milled titanium, QUANTUM LP is suitable for IP67 installation in any application, including extreme environments such as marine, arctic, and desert conditions. Features a minuscule 9mm (0.35") diameter aperture with a custom-milled Milanese sharp-cutoff metallic cup reflector, for optimum throw distance and bleed-free beam uniformity.

Because of its tiny size - with fixture dimensions of only 0.75" x 0.75" (21mm x 21mm) - QUANTUM LP is virtually 'all light and no fixture', making it as appropriate for use in historic projects, as it is in modern design projects.

The MINIMIS patent-pending design features a fully-integrated, water-resistant lens+LED module that is resistant to full water immersion and temperatures to -17°C, eliminating the need for gaskets that can crack and fail. However, not suitable for IP 68.

Installation instructions: Drill - or water-jet a clean 17mm Ø hole in your target surface. Feed pigtail through hole. Make final adjustments of position, and press into place using spring-clip's friction hold.

Connect to a 12VDC constant voltage power source per local and federal code. Three year repair or replacement warranty.




IMPORTANT: Because of open, cup-like reflector, QUANTUM LP is not suitable for up-light orientation in wet locations.

Not suitable for general area illumination, task lighting, large facade lighting, etc

APPLICATIONS: Indoor + Outdoor	Accent lighting	Uplighting	Poolside lighting
	Cabinetry lighting	Wall grazing	Luxury marine
	Shower lighting	Decorative	Luxury aviation
	Floor lighting	Safety lighting	Stairwell lighting
		Pathway lighting	Soffit lighting
		Deck lighting	

Contact us for available trim kit for concrete installation.

Material:	Precision, hand-milled titanium
Optics:	58° sharp-cutoff metallic reflector
Pigtail:	23" standard double-sheathed pigtail
Power supply (not included):	12volt DC (constant voltage) See: http://minim.is/power-lp-kit.htm
Color temp:	Standard: QULP27 - 2700° Kelvin +/- 50°K CRI >90
	For more color options, consider QUARK LP

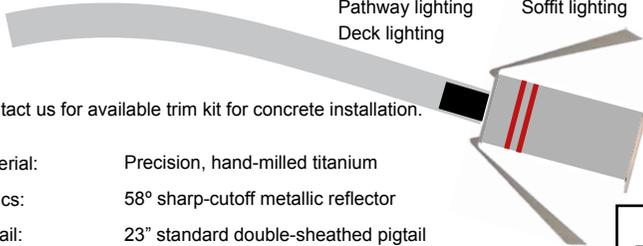



**815 A BRAZOS #377
AUSTIN TEXAS USA**

Tel: +1 512 402 7300

MINIM.IS/contact

Made somewhere in AMERICA.

IP67. Patent pending.

Updated: FEB 2020